


### APPLICATION


Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Operates at bandwidth of 100 MHz. Tinned Copper gives Protection against EMI and avoid signal loss with Higher Mechanical protection.

**This cable well exceeds the requirements of TIA/EIA-568-C.2**

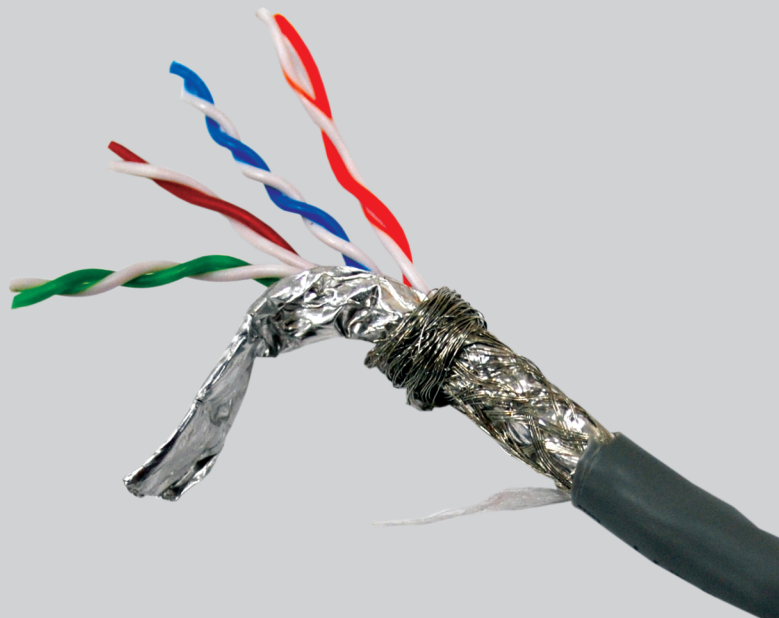

### CONSTRUCTION

Conductor:	24 AWG Solid bare Copper
Insulation:	High Density Polyethylene
Pairs:	2 Insulated conductors twisted together
Shield:	Aluminum / Polyester Foil Tinned copper Braiding
Sheath:	PVC / LSZH
Cable Diameter:	6.5 mm nominal
Printing:	Each meter printed with
<b>D-Link Category 5e SFTP 4/24 AWG UTP Category 5e TIA/EIA 568 C.2 Month/Year XXX M</b>	

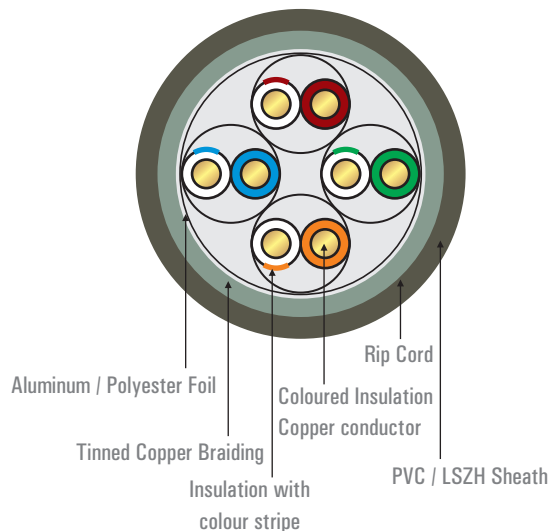

### ✦ COLOR CODE



PAIR NO	COLOR
1-2	White-Orange Stripe and Orange
3-6	White-Green Stripe and Green
4-5	White-Blue Stripe and Blue
7-8	White-Brown Stripe and Brown

### ✦ ELECTRICAL PROPERTIES

Conductor Resistance:	≤ 9.38 Ω/100m
Mutual Capacitance:	< 5.6nF/100m
Resistance Unbalance:	5% Max
Capacitance Unbalance:	330pF/100m
Delay Skew:	< 45nS

### ✦ ELECTRICAL CHARACTERISTICS MEET OR EXCEED TIA/EIA-568-C.2

Frequency MHz	Insertion Loss (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	ACR (dB)	PSACR (dB)
1	2.0	20.0	65.3	62.3	63.8	60.8	63.3	60.3
4	4.1	23.0	56.3	53.3	51.8	48.8	52.2	49.2
8	5.8	24.5	51.8	48.8	45.7	42.7	46.0	43.0
10	6.5	25.0	50.3	47.3	43.8	40.8	43.8	40.8
16	8.2	25.0	47.2	44.2	39.7	36.7	39.0	36.0
20	9.3	25.0	45.8	42.8	37.8	34.8	36.5	33.5
25	10.4	24.3	44.3	41.3	35.8	32.8	33.9	30.9
31.25	11.7	23.6	42.9	39.9	33.9	30.9	31.2	28.2
62.5	17.0	21.5	38.4	35.4	27.9	24.9	21.4	18.4
100	22.0	20.1	35.3	32.3	23.8	20.8	13.3	10.3

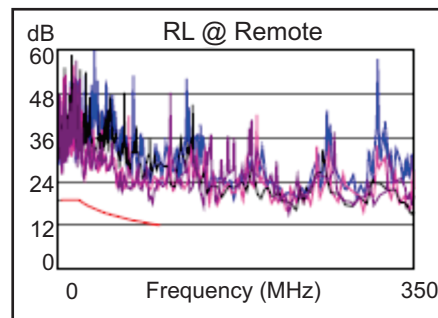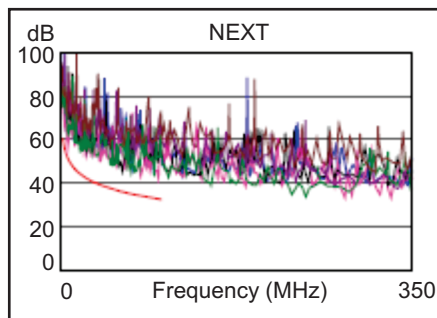

### ✦ MECHANICAL PROPERTIES

Bending Radius: < 8 x Cable Diameter at -20°C ± 1°C

Pulling Force: 9.0 Kgs

Temperature Range: -20° to +70°C

### ✦ CONNECTION SYSTEM

Compatible with all common systems according to

TIA/EIA 568-C.2

### ✦ PACKING

Available in 305meter coils or as per customer requirement

### ✦ ORDERING INFORMATION

Part Code	Description
NCB-5ESBLUR-305	CAT5e SFTP 24AWG Solid: 305M

D-Link (India) Limited

Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059

Specifications are subject to change without notice.

D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.

All other trademarks belong to their respective owners.

©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)