


APPLICATION

Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Operates at bandwidth of 250MHz.

This cable well exceeds the requirements of TIA/EIA-568-C.2 and ISO/IEC 11801

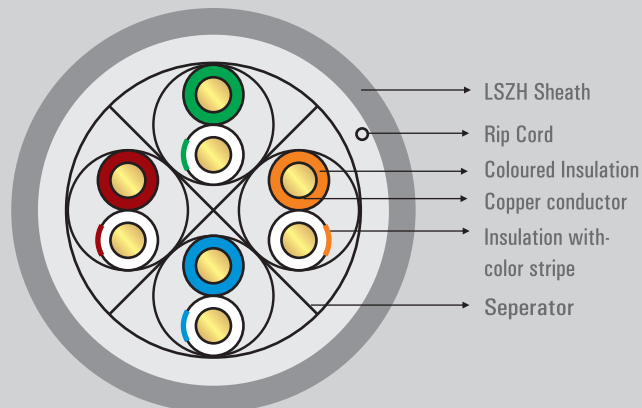

CONSTRUCTION

Conductor:	23 AWG Solid bare Copper (4 pair)
Conductor diameter:	0.50mm
Insulation:	High Density Polyethylene
Insulation diameter:	1.04mm
Pairs:	2 Insulated conductors twisted together
Sheath:	LSZH
Cable Diameter:	6.1 mm nominal
Printing:	Each meter printed with sequential Length Counter
Jacket Nominal Wall Thickness:	0.50mm
Insulation Nominal Wall Thickness:	0.18mm

✦ ELECTRICAL PROPERTIES

Characteristic Impedance:	100 ± 6Ω
Conductor Resistance:	< 9.38 Ω /100m
Insulation Resistance:	100 M Ω
Mutual Capacitance:	< 5.6nF/100m
Resistance Unbalance:	5% Max
Capacitance Unbalance:	330pF/100m
Delay Skew:	< 45nS
NVP:	69%
Operating Voltage:	72V
Dielectric Strength:	1.0KV dc or 0.75KV ac for 1min



✦ COLOUR CODE

PAIR NO	COLOUR
1-2	White-Orange Stripe and Orange
4-5	White-Blue Stripe and Blue

PAIR NO	COLOUR
3-6	White-Green Stripe and Green
7-8	White-Brown Stripe and Brown

✦ TRANSMISSION CHARACTERISTICS PER 100M

Frequency MHz	Insertion Loss (dB/100m)	RL (dB)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)	ACR (dB)	PSACR (dB)
1	2.0	20.0	74.3	72.3	67.8	64.8	72.3	70.3
4	3.8	23.0	65.3	63.3	55.8	52.8	61.5	59.5
8	5.3	24.5	60.8	58.8	49.7	46.7	55.5	53.5
10	6.0	25.0	59.3	57.3	47.8	44.8	53.3	51.3
16	7.6	25.0	56.2	54.2	43.7	40.7	48.6	46.6
20	8.5	25.0	54.8	52.8	41.8	38.8	46.3	44.3
25	9.5	24.3	53.3	51.3	39.8	36.8	43.8	41.8
31.25	10.7	23.6	51.9	49.9	37.9	34.9	41.2	39.2
62.5	15.4	21.5	47.4	45.4	31.9	28.9	32.0	30.0
100	19.8	20.1	44.3	42.3	27.8	24.8	24.5	22.5
200	29.0	18.0	39.8	37.8	21.8	18.8	10.8	8.8
250	32.8	17.3	38.3	36.3	19.8	16.8	5.5	3.5

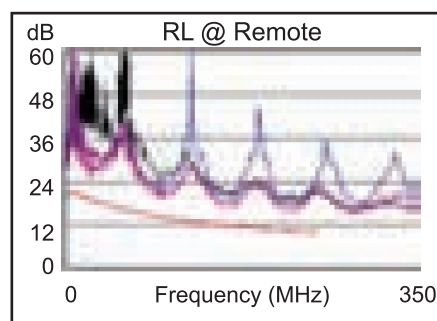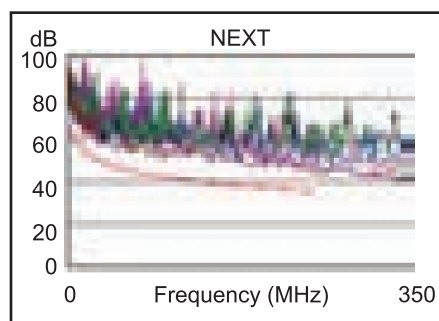

✦ MECHANICAL PROPERTIES

Bending Radius: < 25.4mm at -20°C ± 1°C

Pulling Force: 11.5 Kg

Operating Temperature Range: +70°C to +75°C

Storage Temperature Range: 0°C to +50°C

✦ ORDERING INFORMATION

Part Code	Description
NCB-C6UGRYR-305-LS	Solid Cable Cat6, 4pair, UTP-LSZH, 305M

✦ CONNECTION SYSTEM

Compatible with all common systems according to TIA/EIA 568-C.2 and ISO/IEC 11801



PACKING

Available in easy-pull boxes/Reels of guaranteed 305m Length



D-Link (India) Limited
 Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059
 Specifications are subject to change without notice.
 D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
 All other trademarks belong to their respective owners.
 ©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)