


How to setup multi-zone motion detection recording?

Step 1: Connect the power of the camera.


Step 2: Open **Mydlink** apps on the mobile device.




Step 3: Enter the register Mydlink **Username and password.**

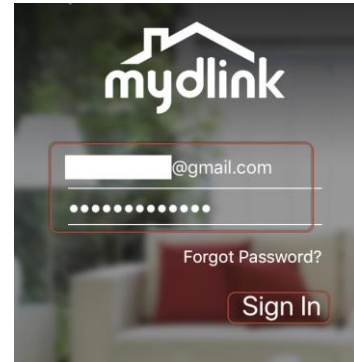


Step 4: Click on the **Menu** Icon.

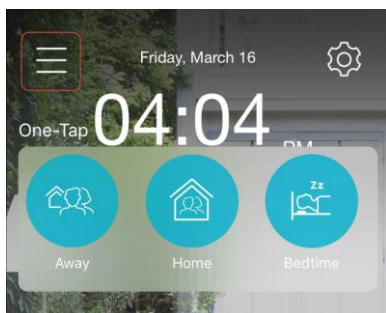


Step 5: Click on **Devices**

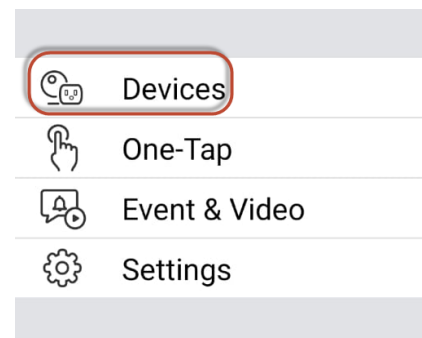


Step 6: Click on **Camera**.

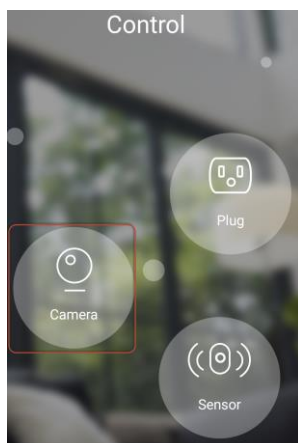


Step 7: Click on **Setting** Icon.

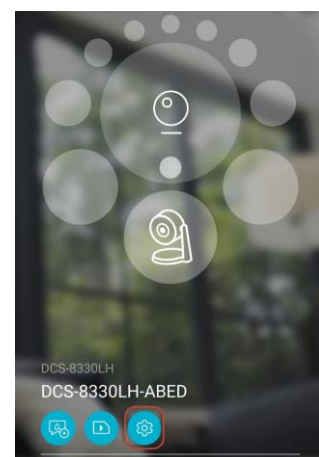

Step 8: Click on **Moving Object Detection**.

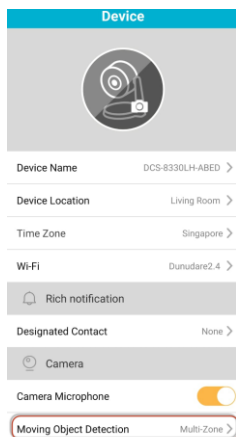


Step 9: Click on **Multi-Zone Motion Detection**.

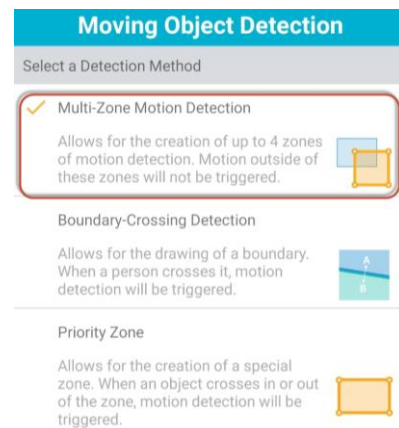


Step 10: a) Click on the live view streams to select or move the detected zones.

b) Move the slider to adjust the sensitivity level for motion detection.

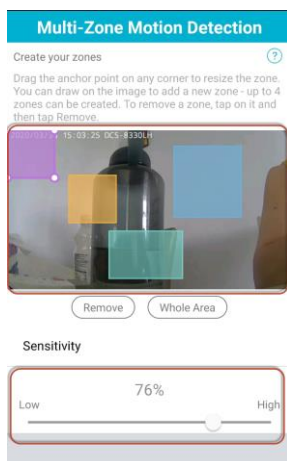


Step 11: a) Press **Back** on your mobile device for **5 Time** and go back to the main page


b) Click on the **Menu** Icon. c) Click on **Settings**.

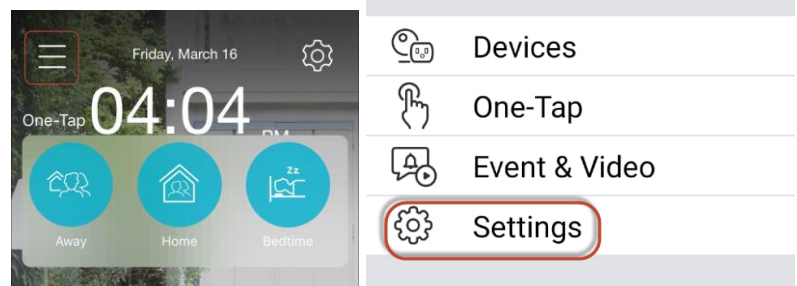


Step 12: Click on **Automation** icon.

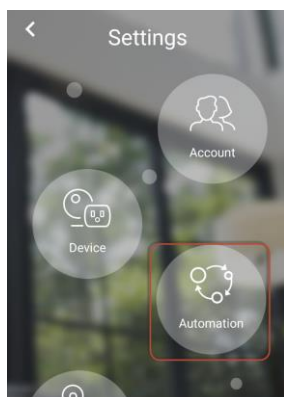


Step 13: Click on the **Add** Icon,

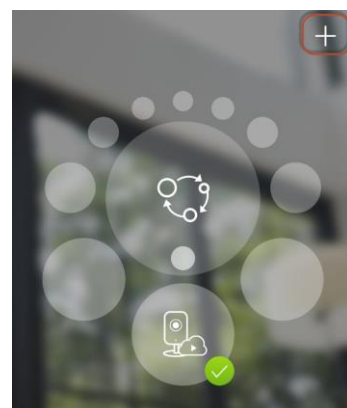


Step 14: Click on **Add** Icon.

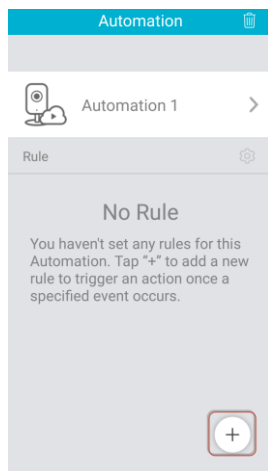


Step 15: a) Select **DCS-8330LH** with a **Motion Detection** icon.
b) Click on **Next**.

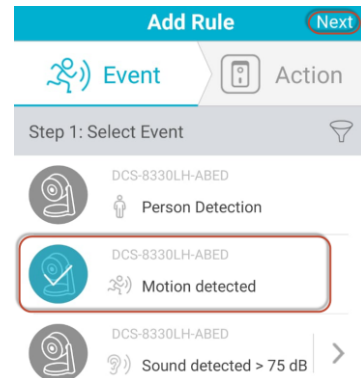

Step 16: a) Select **DCS-8330LH** with **Video Recording** Icon.
b) Click on **Next**.

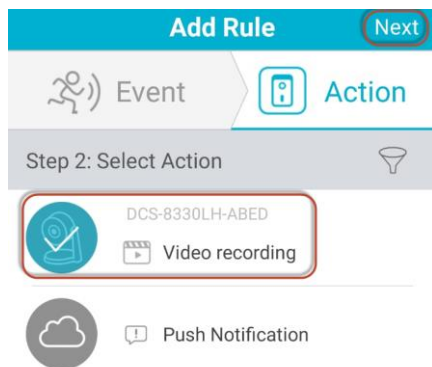

Step 17: Click on **Save**.

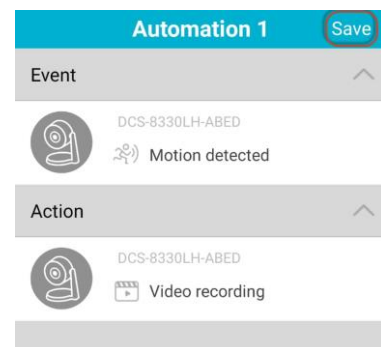

--- END ---